



New Generation
Portable Cold Fogging Machine

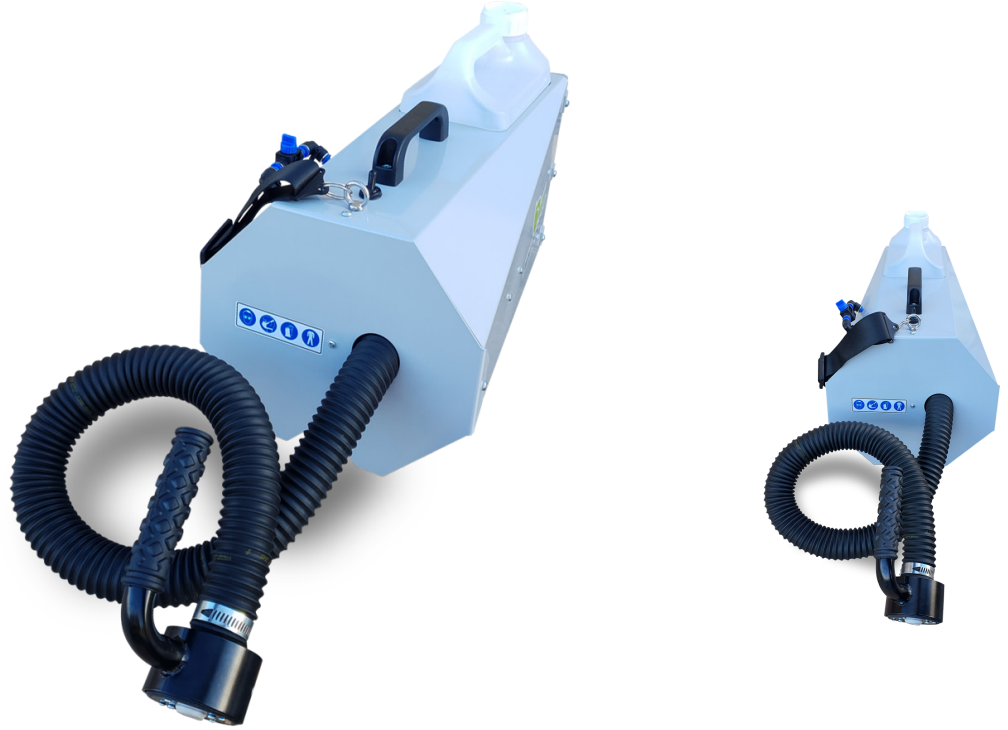

Some superior points:

- TURBO ULV can make 10 micron size, Same with Thermal Foggers.
- Usable with 10 micron size or 50 micron size. Adjustable micron size.
- Turbo ULV can supply **2.390.000.000.000** units particle with 5 liters.
- Two stage air fan and 1 Meter hose long.
- 30 second for 100m² disinfection.
- Air cooled motor.

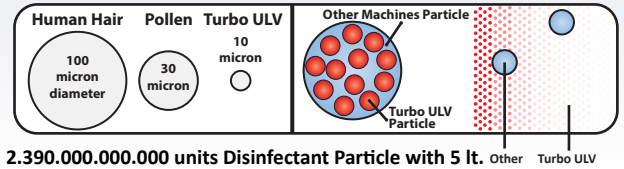

TECHNICAL SPECIFICATIONS

Chassis	: Aluminum
Motor Voltage	: 220/240v AC, 50/60Hz.
Motor Power	: 1000W.
Air Blower	: 2 Stage, Turbo Air Fan.
Solution Tank	: 5 Lt.
Solution Consumption	: Adjustable flow rate. (0-20 Lt./H)
Droplet Size	: 10µm - 50µm (Adjustable with flow rate controller)
Control	: Needle valve (Precise control)
Nozzles	: 1 Mt. hose, 1 ULV cold fogger nozzle
Cord Length	: 3 Mt.
Weight	: 6 Kg.
Dimensions	: 48cm x 30 cm x 35cm (L x W x H)

